



# State Space Methods

## *Lecture 5: introducing reference signals, anti-windup, optimal control*

Jakob Stoustrup

`jakob@control.aau.dk`  
`www.control.aau.dk/~jakob/`

Automation & Control

Department of Electronic Systems

Aalborg University

Denmark




# Contents

- **Introducing the reference signal**
- The zero assignment method
  - Example: zero assignment
- Anti-windup
- Optimal control
  - Example: optimal control
- One slide course summary




# Introducing reference signals (1)

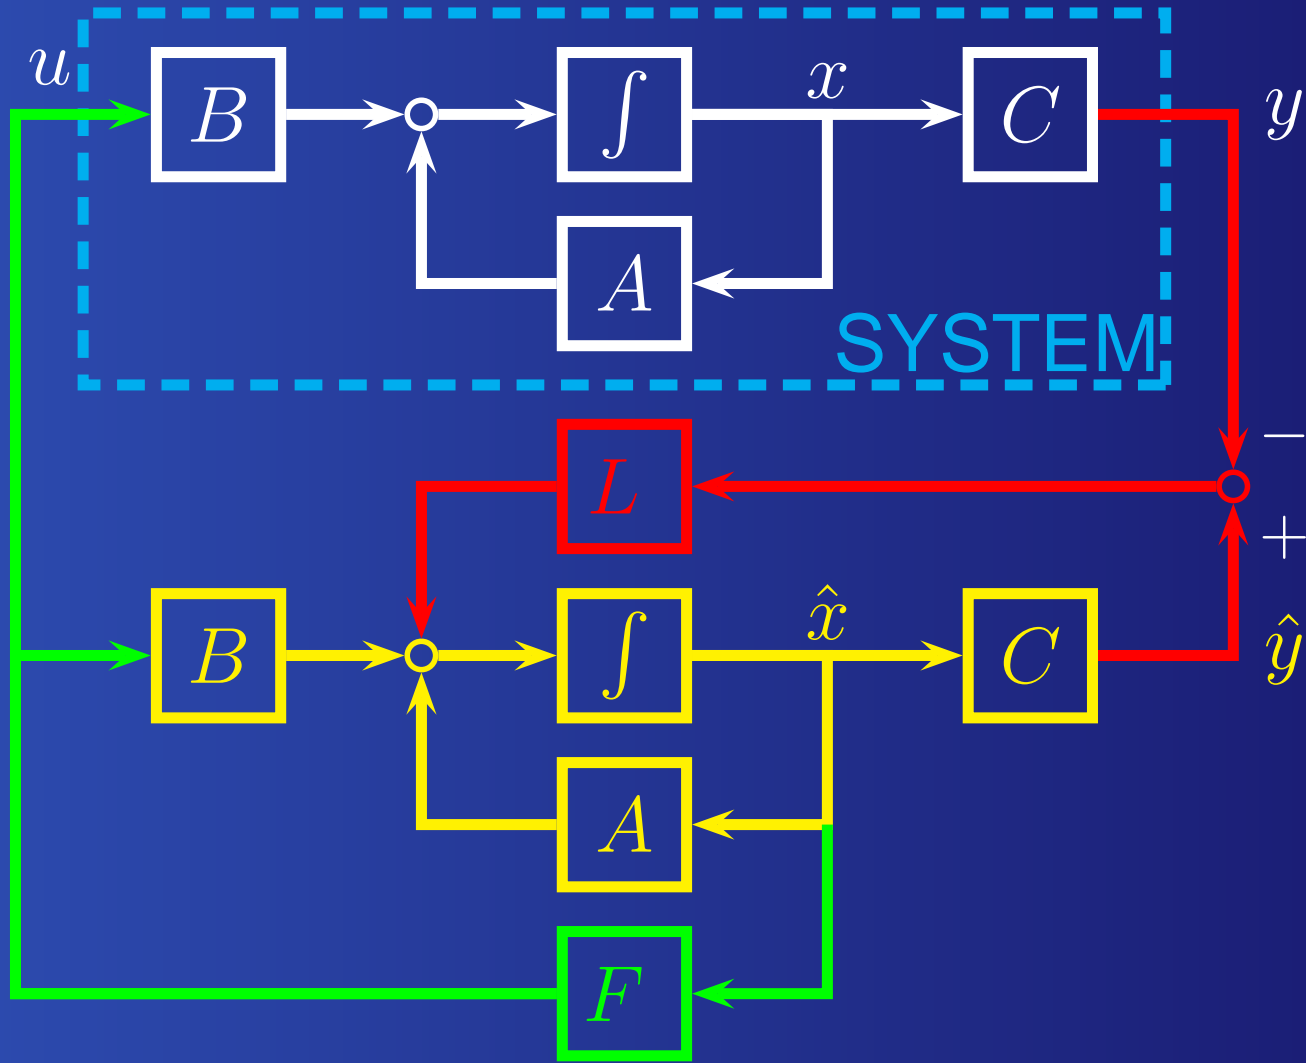



# Introducing reference signals (1)

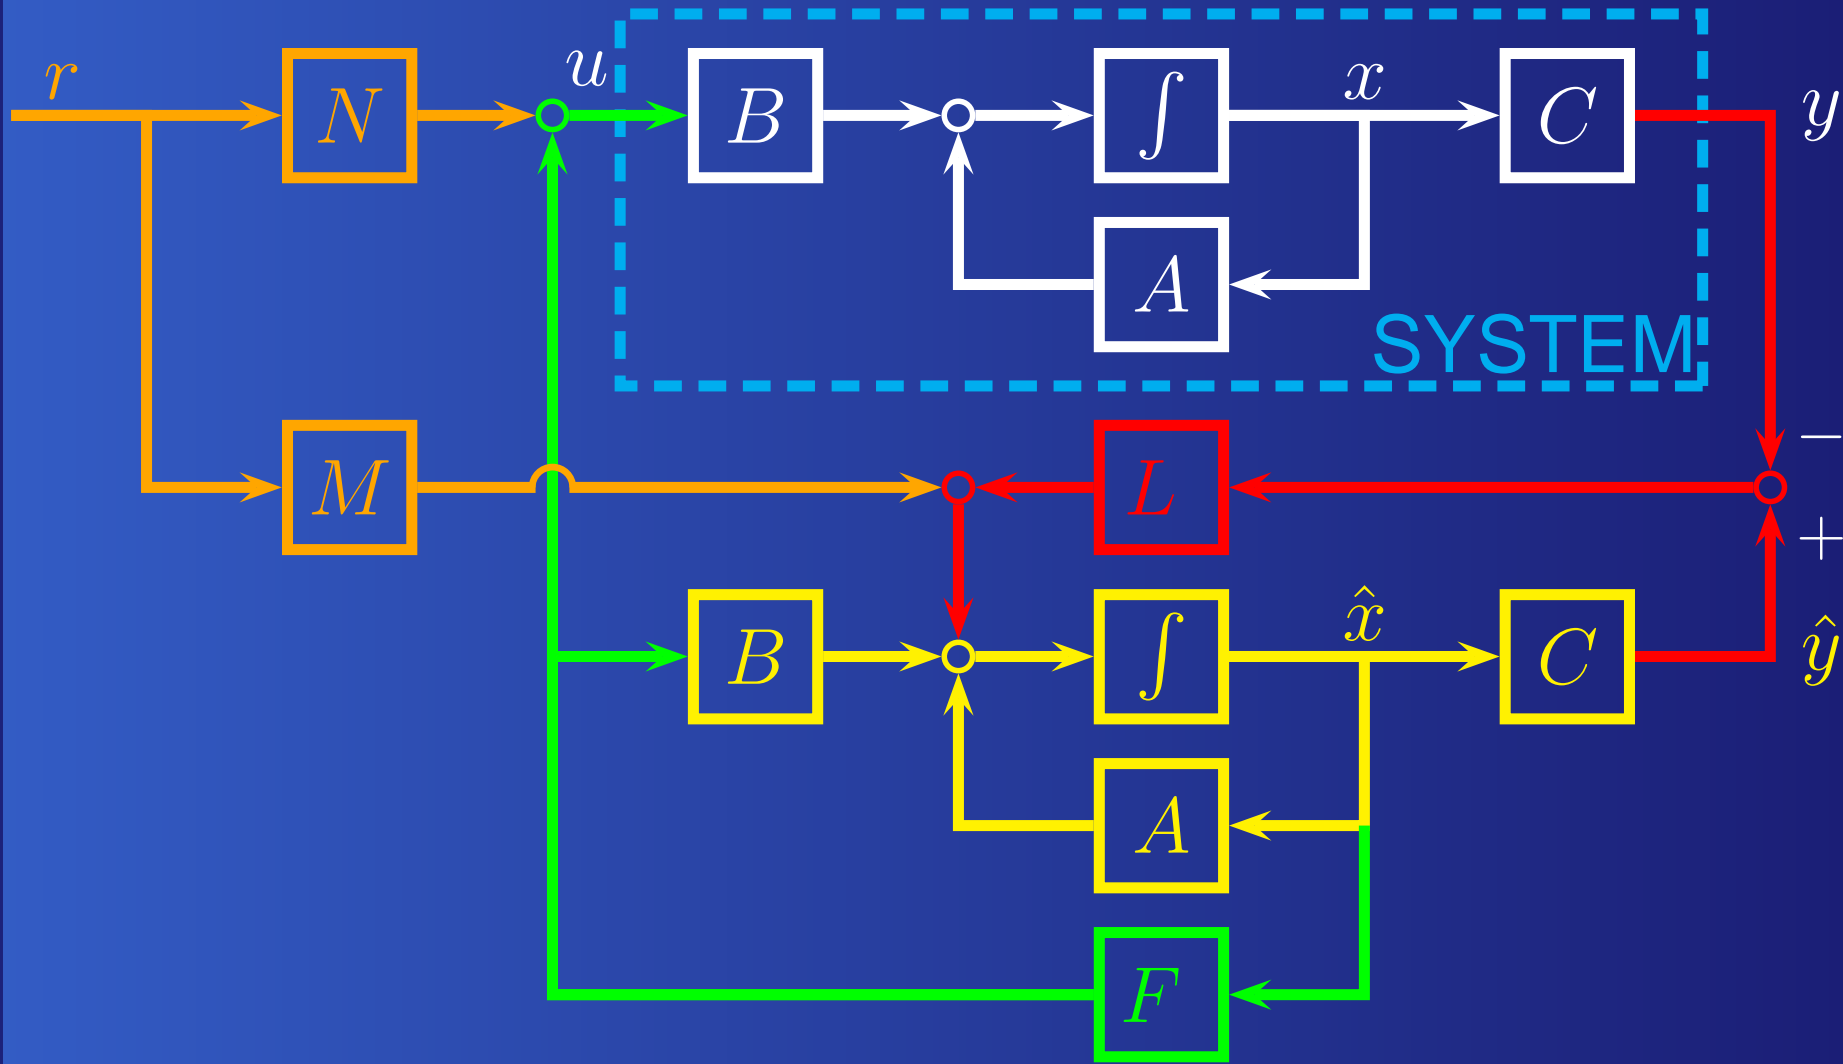



# Introducing reference signals (2)

System:

$$\dot{x} = Ax + B(F\hat{x} + Nr)$$

$$y = Cx$$

Observer:

$$\dot{\hat{x}} = A\hat{x} + BF\hat{x} + L(C\hat{x} - y) + Mr$$



# Introducing reference signals (2)

System:

$$\dot{x} = Ax + B(F\hat{x} + Nr)$$

$$y = Cx$$

Observer:

$$\dot{\hat{x}} = A\hat{x} + BF\hat{x} + L(C\hat{x} - y) + Mr$$

$$\begin{pmatrix} \dot{x} \\ \dot{\hat{x}} \end{pmatrix} = \begin{pmatrix} A & BF \\ -LC & A + BF + LC \end{pmatrix} \begin{pmatrix} x \\ \hat{x} \end{pmatrix} + \begin{pmatrix} BN \\ M \end{pmatrix} r$$

$$y = \begin{pmatrix} C & 0 \end{pmatrix} \begin{pmatrix} x \\ \hat{x} \end{pmatrix}$$



# Zeros of systems

We have previously introduced this result:

**LEMMA.** A square (#inputs=#outputs) system with a state space model of the form

$$\begin{aligned} \dot{x} &= Ax + Bu \\ y &= Cx + Du \end{aligned}$$

has a zero with value  $z \in \mathbb{C}$  only if

$$\det \begin{pmatrix} A - zI & B \\ C & D \end{pmatrix} = 0$$



# Zero assignment

$$\det \begin{pmatrix} A_{cl} - zI & B_{cl} \\ C_{cl} & D_{cl} \end{pmatrix} = 0$$



# Zero assignment


$$\det \begin{pmatrix} A_{cl} - zI & B_{cl} \\ C_{cl} & D_{cl} \end{pmatrix} = 0$$

$$\det \begin{pmatrix} A - zI & BF & BN \\ -LC & A + BF + LC - zI & M \\ C & 0 & 0 \end{pmatrix} = 0$$



# Zero assignment

$$\det \begin{pmatrix} A_{cl} - zI & B_{cl} \\ C_{cl} & D_{cl} \end{pmatrix} = 0$$

$$\det \begin{pmatrix} A - zI & BF & BN \\ -LC & A + BF + LC - zI & M \\ C & 0 & 0 \end{pmatrix} = 0$$




# Zero assignment

$$\det \begin{pmatrix} A_{cl} - zI & B_{cl} \\ C_{cl} & D_{cl} \end{pmatrix} = 0$$

$$\det \begin{pmatrix} A - zI & BF & BN \\ -LC & A + BF + LC - zI & M \\ C & 0 & 0 \end{pmatrix} = 0$$

$$\det \begin{pmatrix} A - zI & BF - BNN^{-1}F & BN \\ -LC & A + BF + LC - zI - MN^{-1}F & M \\ C & 0 & 0 \end{pmatrix} = 0$$



# Zero assignment

$$\det \begin{pmatrix} A - zI & BF & BN \\ -LC & A + BF + LC - zI & M \\ C & 0 & 0 \end{pmatrix} = 0$$

$$\det \begin{pmatrix} A - zI & BF - BNN^{-1}F & BN \\ -LC & A + BF + LC - zI - MN^{-1}F & M \\ C & 0 & 0 \end{pmatrix} = 0$$

$$\det \begin{pmatrix} A - zI & 0 & BN \\ -LC & A + BF + LC - MN^{-1}F - zI & M \\ C & 0 & 0 \end{pmatrix} = 0$$



# Zero assignment

$$\det \begin{pmatrix} A - zI & BF - BNN^{-1}F & BN \\ -LC & A + BF + LC - zI - MN^{-1}F & M \\ C & 0 & 0 \end{pmatrix} = 0$$

$$\det \begin{pmatrix} A - zI & 0 & BN \\ -LC & A + BF + LC - MN^{-1}F - zI & M \\ C & 0 & 0 \end{pmatrix} = 0$$

$$\det \begin{pmatrix} A - zI & 0 & B \\ -LC & A + BF + LC - \tilde{M}F - zI & \tilde{M} \\ C & 0 & 0 \end{pmatrix} = 0$$



# Zero assignment

$$\det \begin{pmatrix} A - zI & BF - BNN^{-1}F & BN \\ -LC & A + BF + LC - zI - MN^{-1}F & M \\ C & 0 & 0 \end{pmatrix} = 0$$

$$\det \begin{pmatrix} A - zI & 0 & BN \\ -LC & A + BF + LC - MN^{-1}F - zI & M \\ C & 0 & 0 \end{pmatrix} = 0$$

$$\det \begin{pmatrix} A - zI & 0 & B \\ -LC & A + BF + LC - \tilde{M}F - zI & \tilde{M} \\ C & 0 & 0 \end{pmatrix} = 0$$



# Zero assignment

$$\det \begin{pmatrix} A - zI & 0 & BN \\ -LC & A + BF + LC - MN^{-1}F - zI & M \\ C & 0 & 0 \end{pmatrix} = 0$$

$$\det \begin{pmatrix} A - zI & 0 & B \\ -LC & A + BF + LC - \tilde{M}F - zI & \tilde{M} \\ C & 0 & 0 \end{pmatrix} = 0$$

$$\begin{cases} \det \begin{pmatrix} A - zI & B \\ C & 0 \end{pmatrix} = 0 & \text{or} \\ \det \left( A + BF + LC - \tilde{M}F - zI \right) = 0 \end{cases}$$



# Contents

- Introducing the reference signal
- **The zero assignment method**
  - Example: zero assignment
- Anti-windup
- Optimal control
  - Example: optimal control
- One slide course summary



# Zero assignment

**LEMMA.** If  $\tilde{M}$  is an 'observer gain' such that the characteristic polynomial of the matrix  $A_{za} + \tilde{M}C_{za}$  has the characteristic polynomial

$$\det \left( sI - \left( A_{za} + \tilde{M}C_{za} \right) \right) = (s - z_1) \cdots (s - z_n)$$

with  $A_{za} = A + BF + LC$  and  $C_{za} = -F$ , then the numbers  $z_1, \dots, z_n$  are all zeros of the closed loop transfer function from  $r$  to  $y$ .



# Algorithm for zero assignment

1. Design  $\tilde{M}$  assigning zeros close to the cut-off frequency of the Bode plot, such that the 'horizontal' part is extended.



# Algorithm for zero assignment

2. Compute  $N$  such that the DC-value of the transfer function from  $r$  to  $y$  is unity:

$$N = - \left( C_{\text{cl}} A_{\text{cl}}^{-1} \tilde{B}_{\text{cl}} \right)^{-1}$$

where

$$A_{\text{cl}} = \begin{pmatrix} A & BF \\ -LC & A + BF + LC \end{pmatrix}, \quad \tilde{B}_{\text{cl}} = \begin{pmatrix} B \\ \tilde{M} \end{pmatrix}$$

$$C_{\text{cl}} = \begin{pmatrix} C & 0 \end{pmatrix}$$



# Algorithm for zero assignment

2. Compute  $N$  such that the DC-value of the transfer function from  $r$  to  $y$  is unity:

$$N = - \left( C_{\text{cl}} A_{\text{cl}}^{-1} \tilde{B}_{\text{cl}} \right)^{-1}$$

where

$$A_{\text{cl}} = \begin{pmatrix} A & BF \\ -LC & A + BF + LC \end{pmatrix}, \quad \tilde{B}_{\text{cl}} = \begin{pmatrix} B \\ \tilde{M} \end{pmatrix}$$

$$C_{\text{cl}} = \begin{pmatrix} C & 0 \end{pmatrix}$$

3. Compute  $M = MN^{-1}N = \tilde{M}N$ .



# Contents

- Introducing the reference signal
- The zero assignment method
  - **Example: zero assignment**
- Anti-windup
- Optimal control
  - Example: optimal control
- One slide course summary



# Example: zero assignment (1)

We consider again the system

$$\begin{aligned}\dot{x} &= \begin{pmatrix} 2 & -3 \\ 4 & -5 \end{pmatrix} x + \begin{pmatrix} 2 \\ 3 \end{pmatrix} u \\ y &= \begin{pmatrix} -3 & 2 \end{pmatrix} x\end{aligned}$$

A state feedback  $F$  that assign poles in  $\{-3, -4\}$  and an observer gain  $L$  that assigns poles in  $\{-9, -12\}$  are given by:

$$F = \begin{pmatrix} 22 & -16 \end{pmatrix}, \quad L = \begin{pmatrix} -122 \\ -192 \end{pmatrix}$$

We would like to assign zeros from  $r$  to  $y$  in  $\{-3, -4\}$  to cancel the poles from  $F$ .



## Example: zero assignment (2)

With these values of  $F$  and  $L$  we obtain:

$$A_{za} = A + BF + LC = \begin{pmatrix} 412 & -279 \\ 646 & -437 \end{pmatrix}$$

$$C_{za} = -F = \begin{pmatrix} -22 & 16 \end{pmatrix}$$

An 'observer gain' that assigns poles in  $\{-3, -4\}$  for  $A_{za} + \tilde{M}C_{za}$  is

$$\tilde{M} = \begin{pmatrix} 7.0460 \\ 10.8133 \end{pmatrix}$$



## Example: zero assignment (3)

$N$  can be computed as:

$$N =$$


$$= \left( \begin{pmatrix} C & 0 \end{pmatrix} \begin{pmatrix} A & BF \\ -LC & A + BF + LC \end{pmatrix}^{-1} \begin{pmatrix} B \\ \tilde{M} \end{pmatrix} \right)^{-1}$$
$$= 108$$

$M$  is obtained from:

$$M = \tilde{M}N = \begin{pmatrix} 7.0460 \\ 10.8133 \end{pmatrix} \cdot 108 = \begin{pmatrix} 760.97 \\ 1167.84 \end{pmatrix}$$




# Example: Bode plot

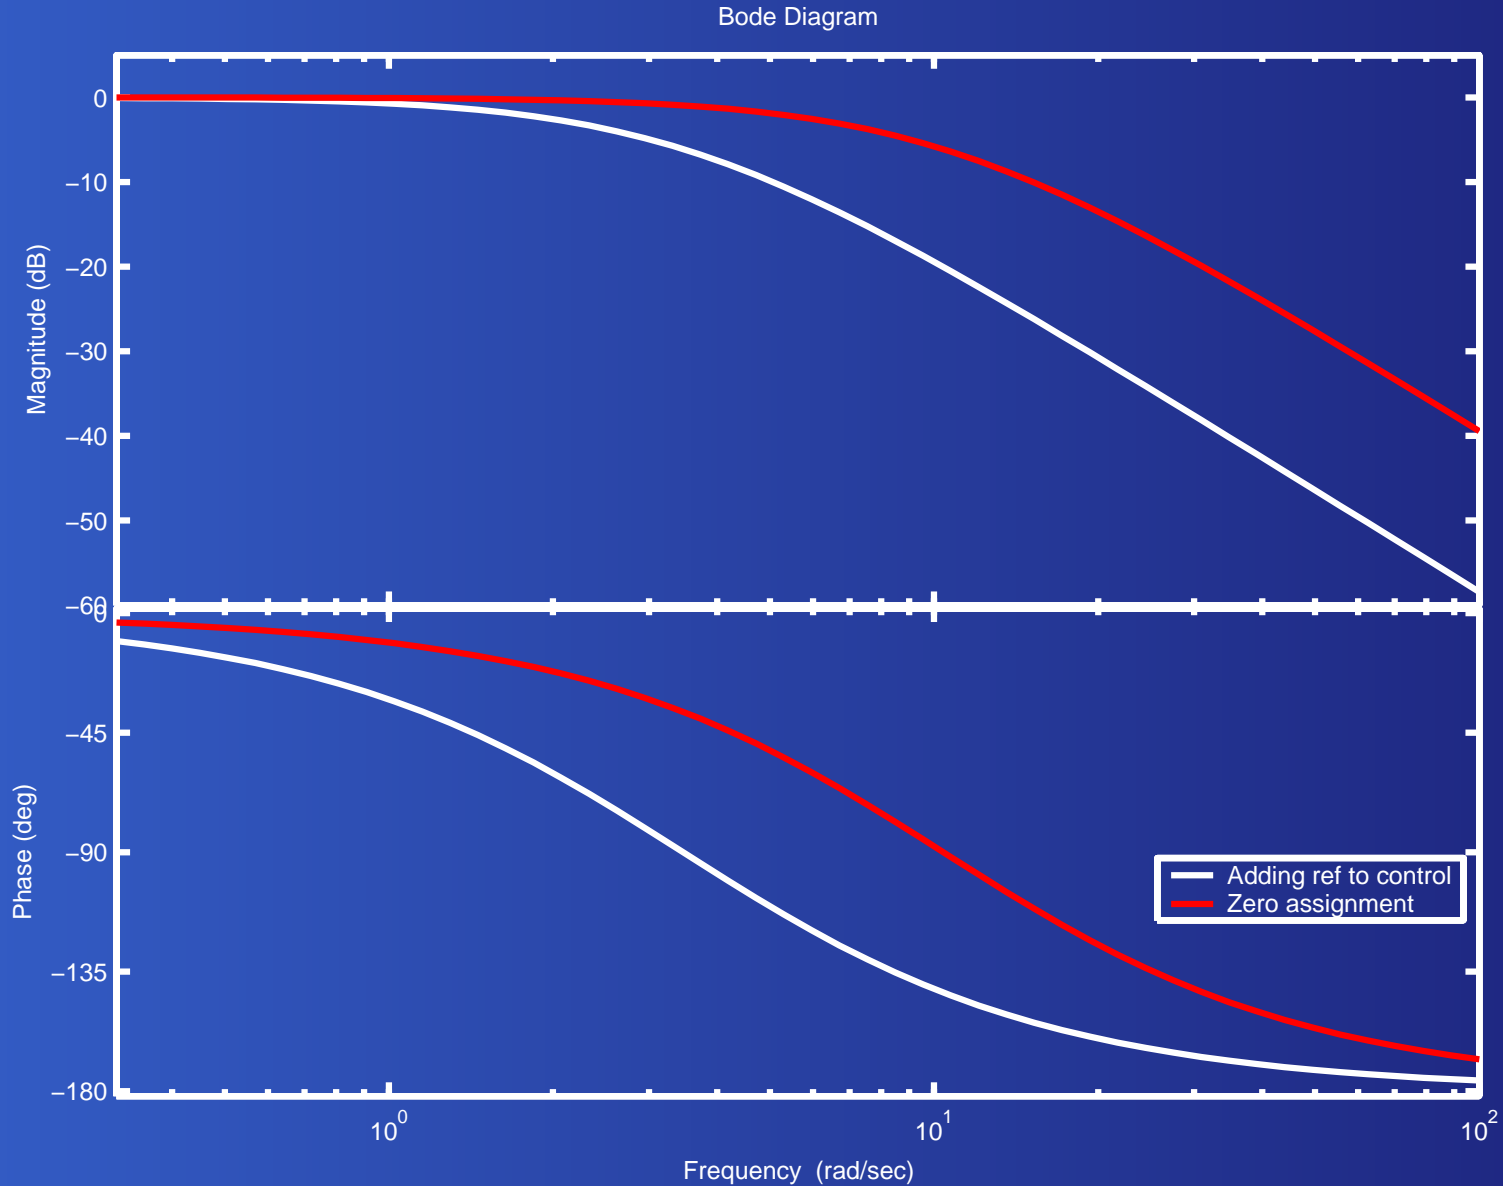



# Example: step response

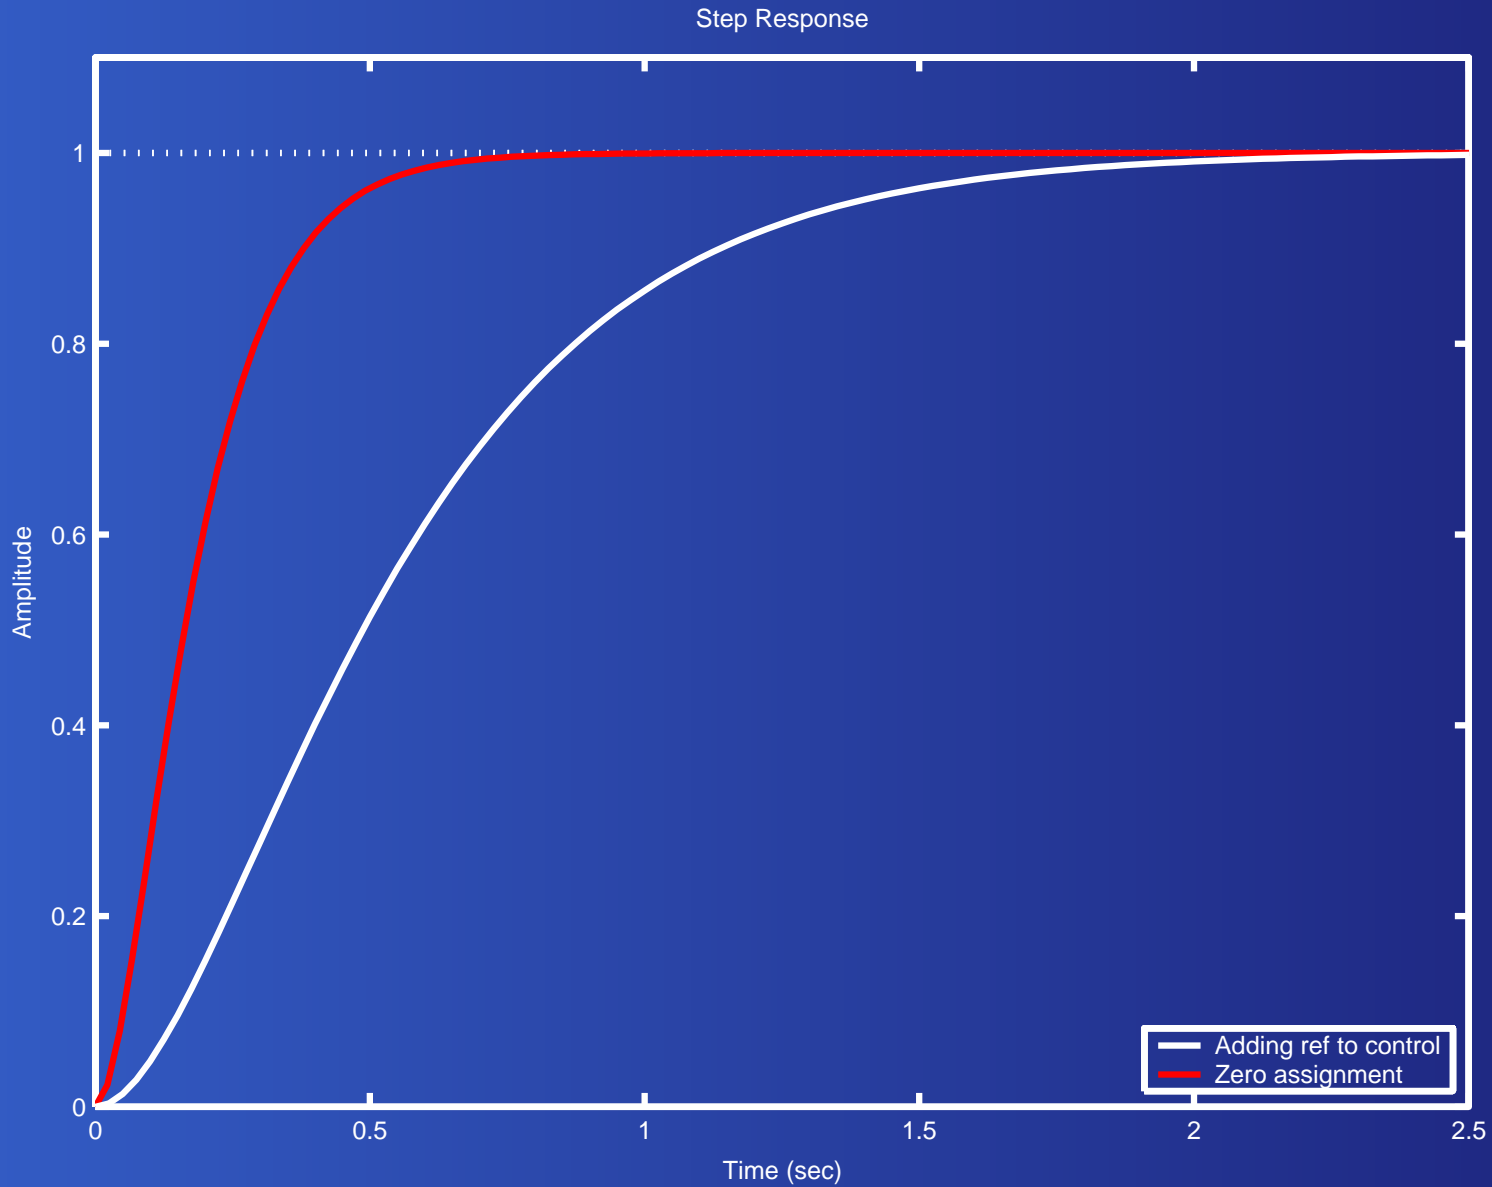




# Contents

- Introducing the reference signal
- The zero assignment method
  - Example: zero assignment
- **Anti-windup**
- Optimal control
  - Example: optimal control
- One slide course summary




# Anti-windup architecture

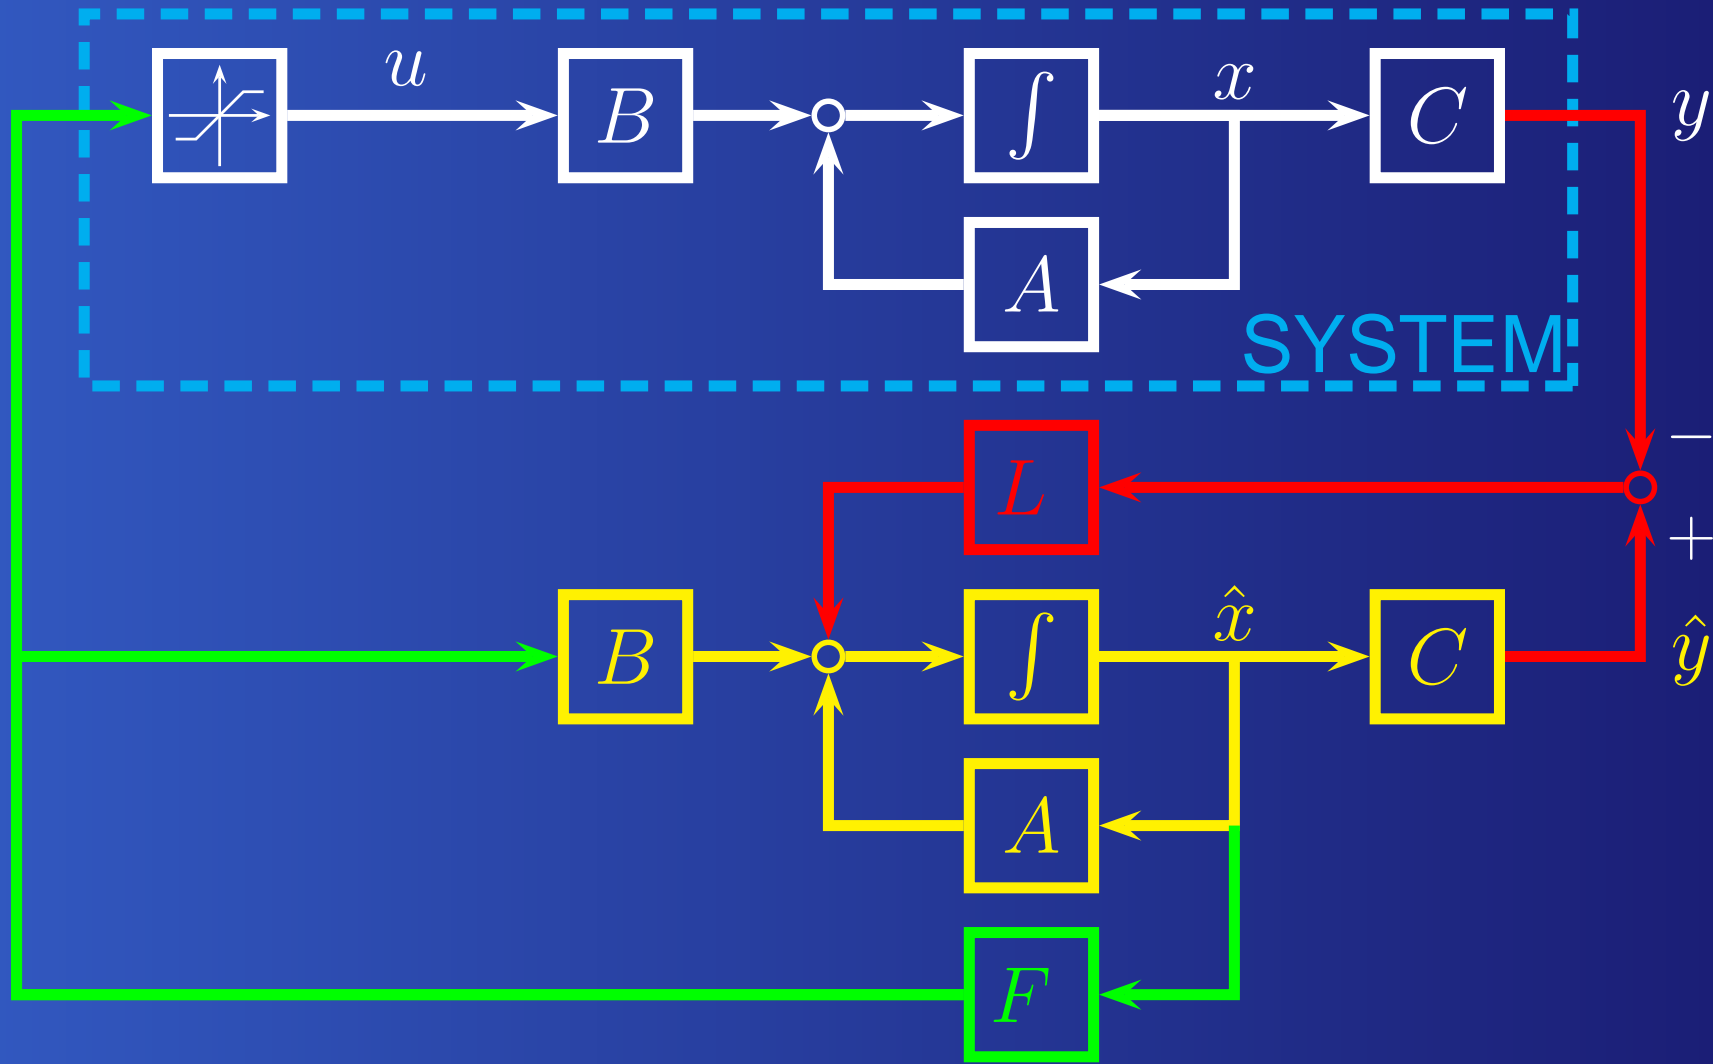




# Anti-windup architecture

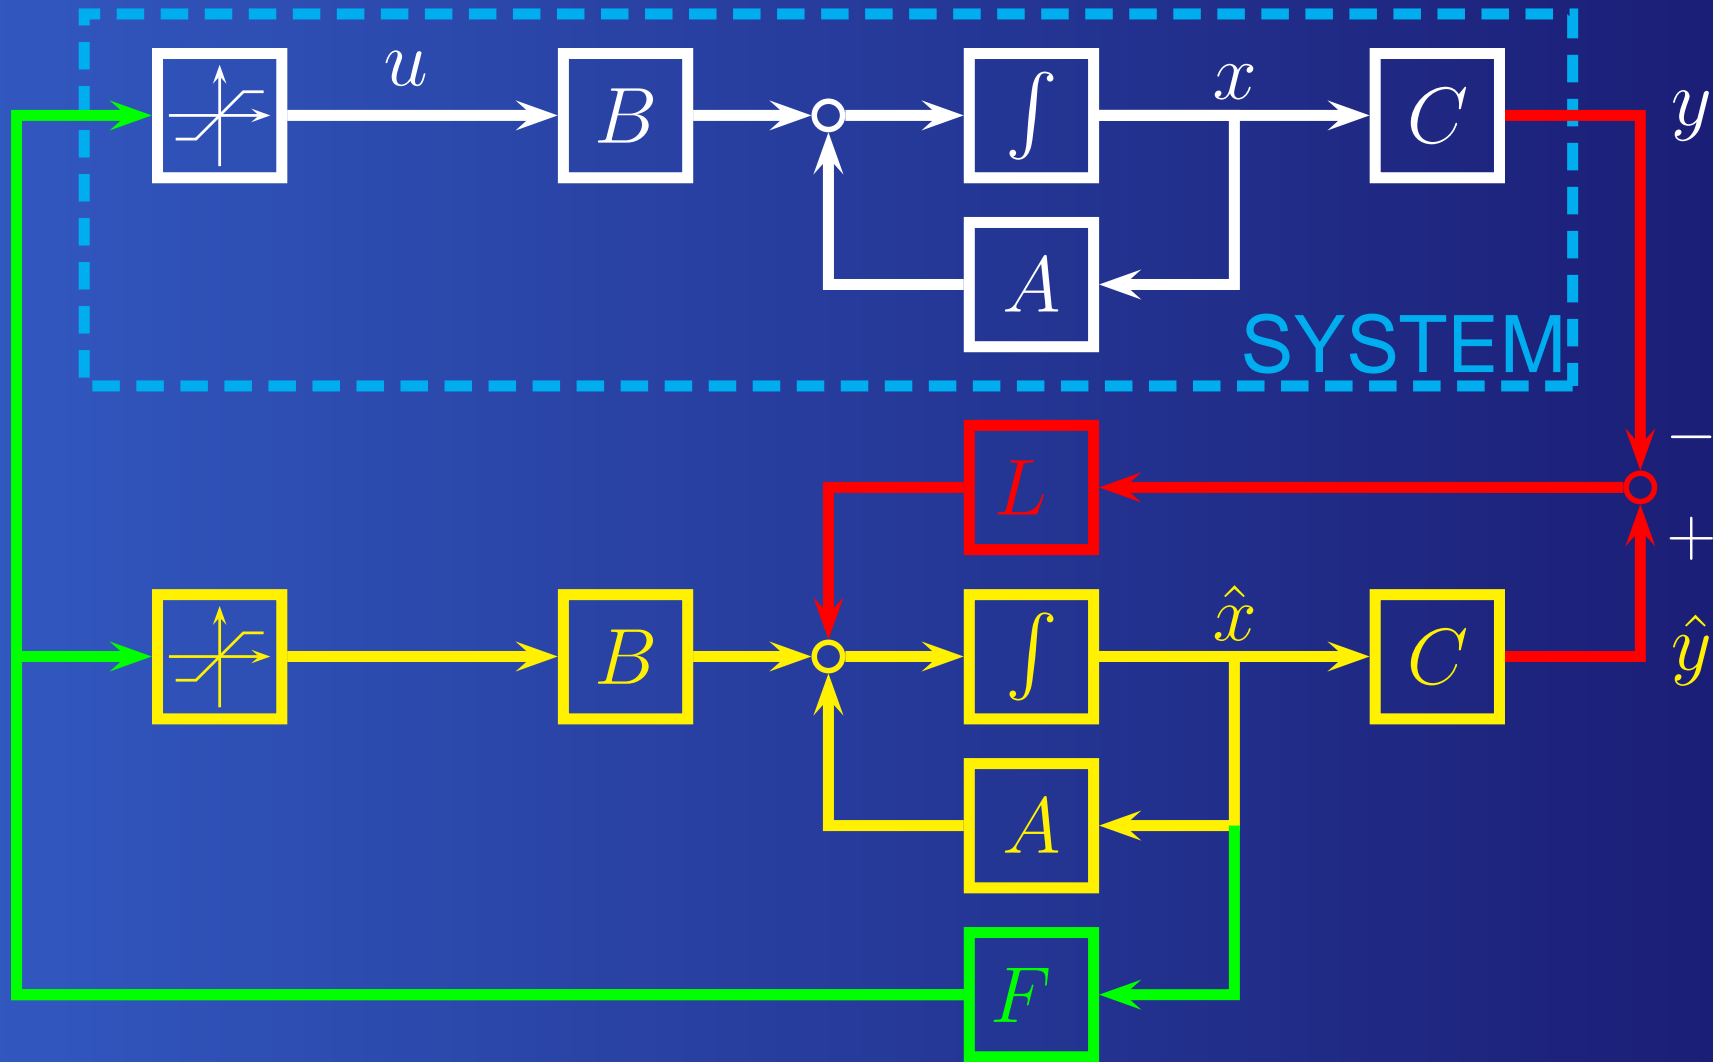




# Anti-windup architecture

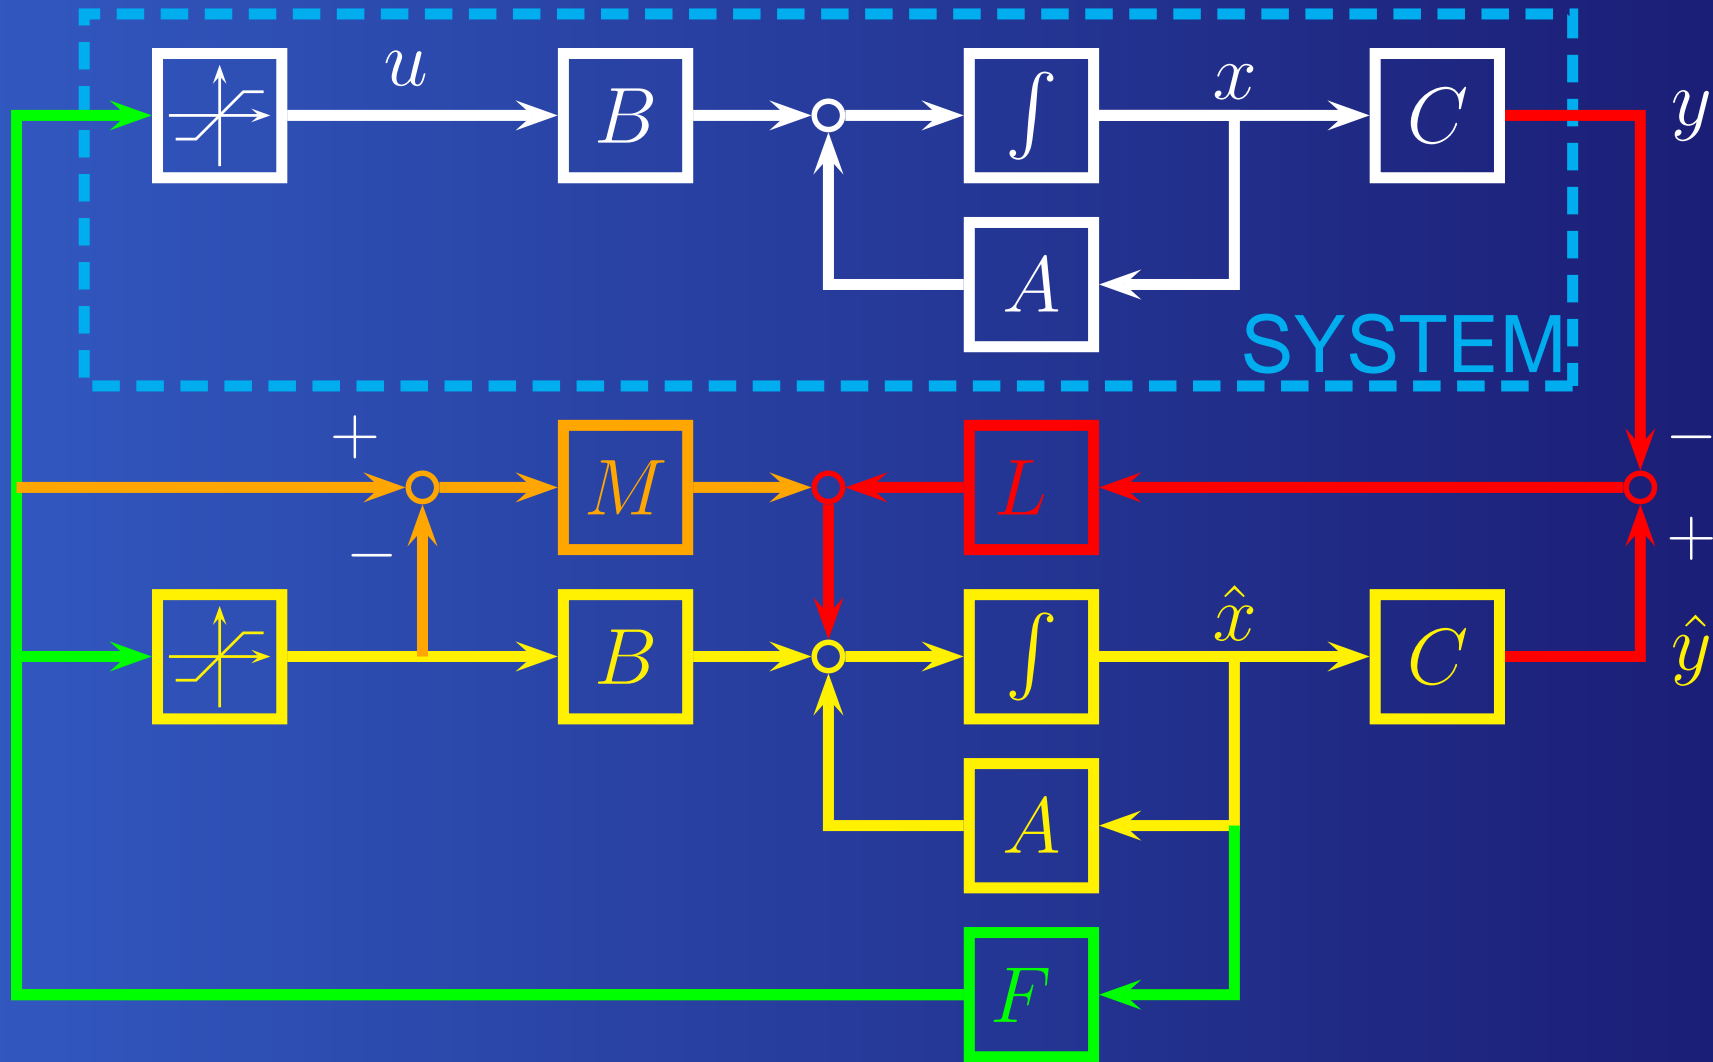




# Anti-windup architecture, nominal

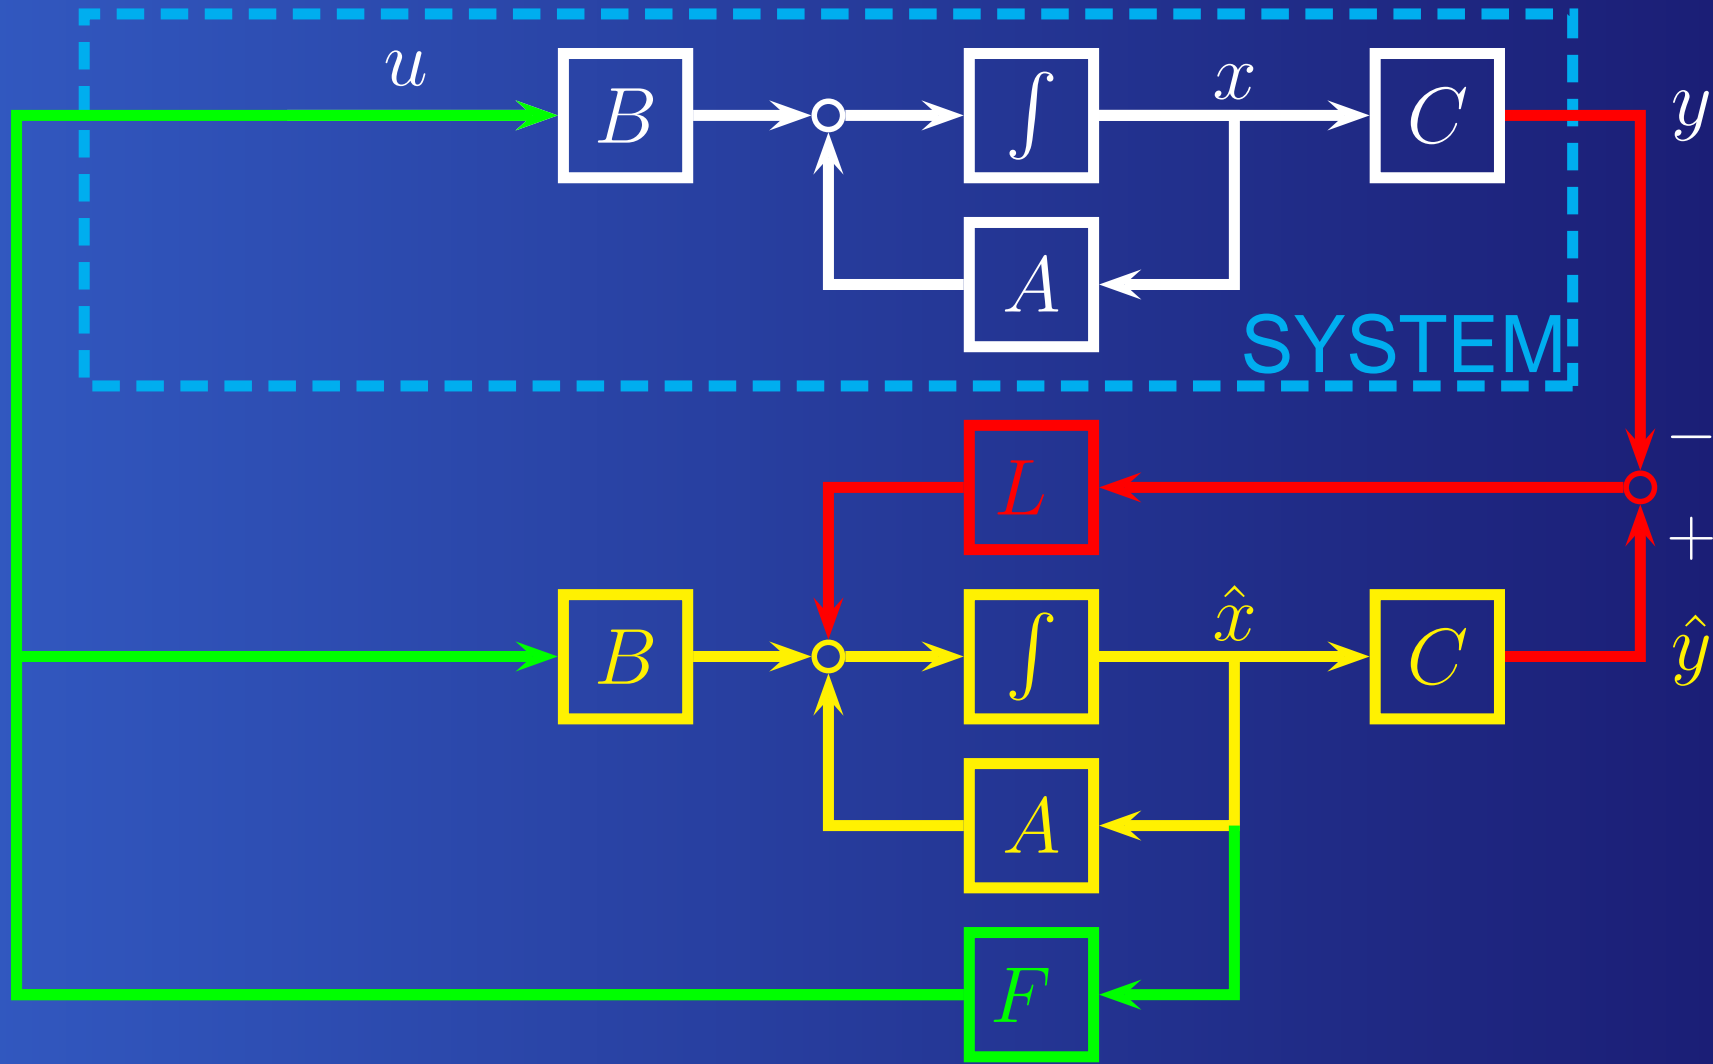




# Anti-windup architecture, saturated

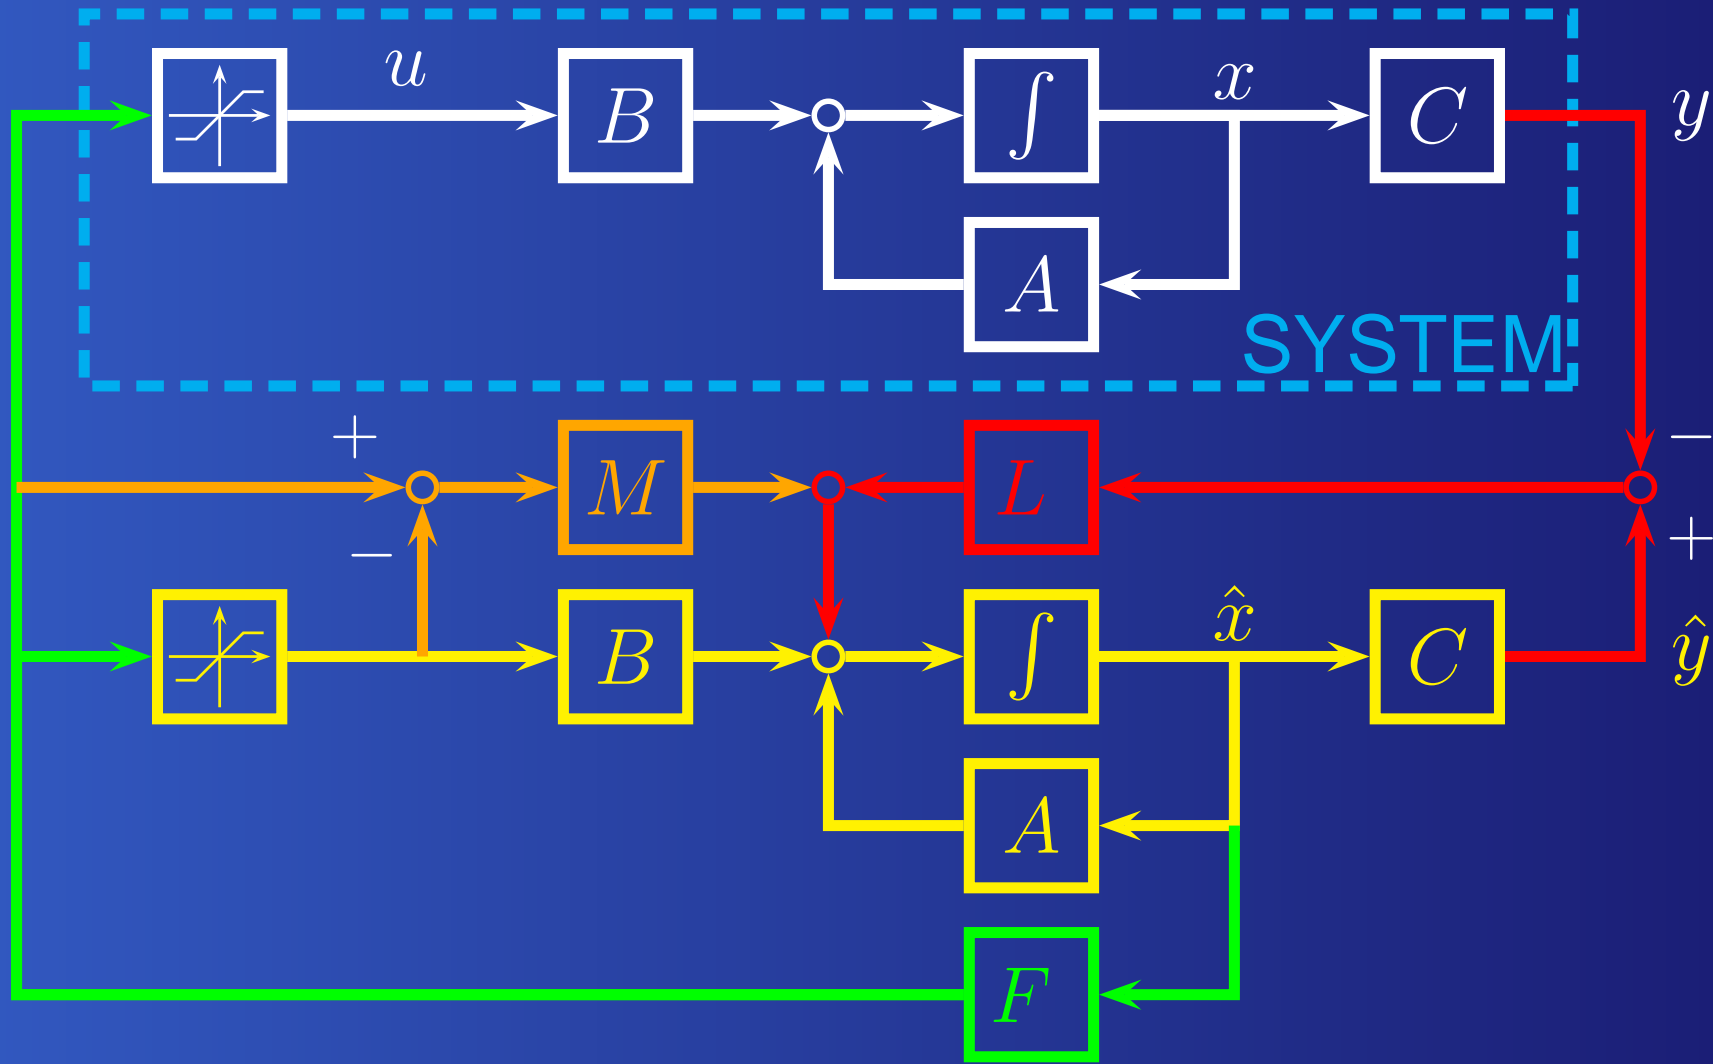




# Anti-windup architecture, saturated

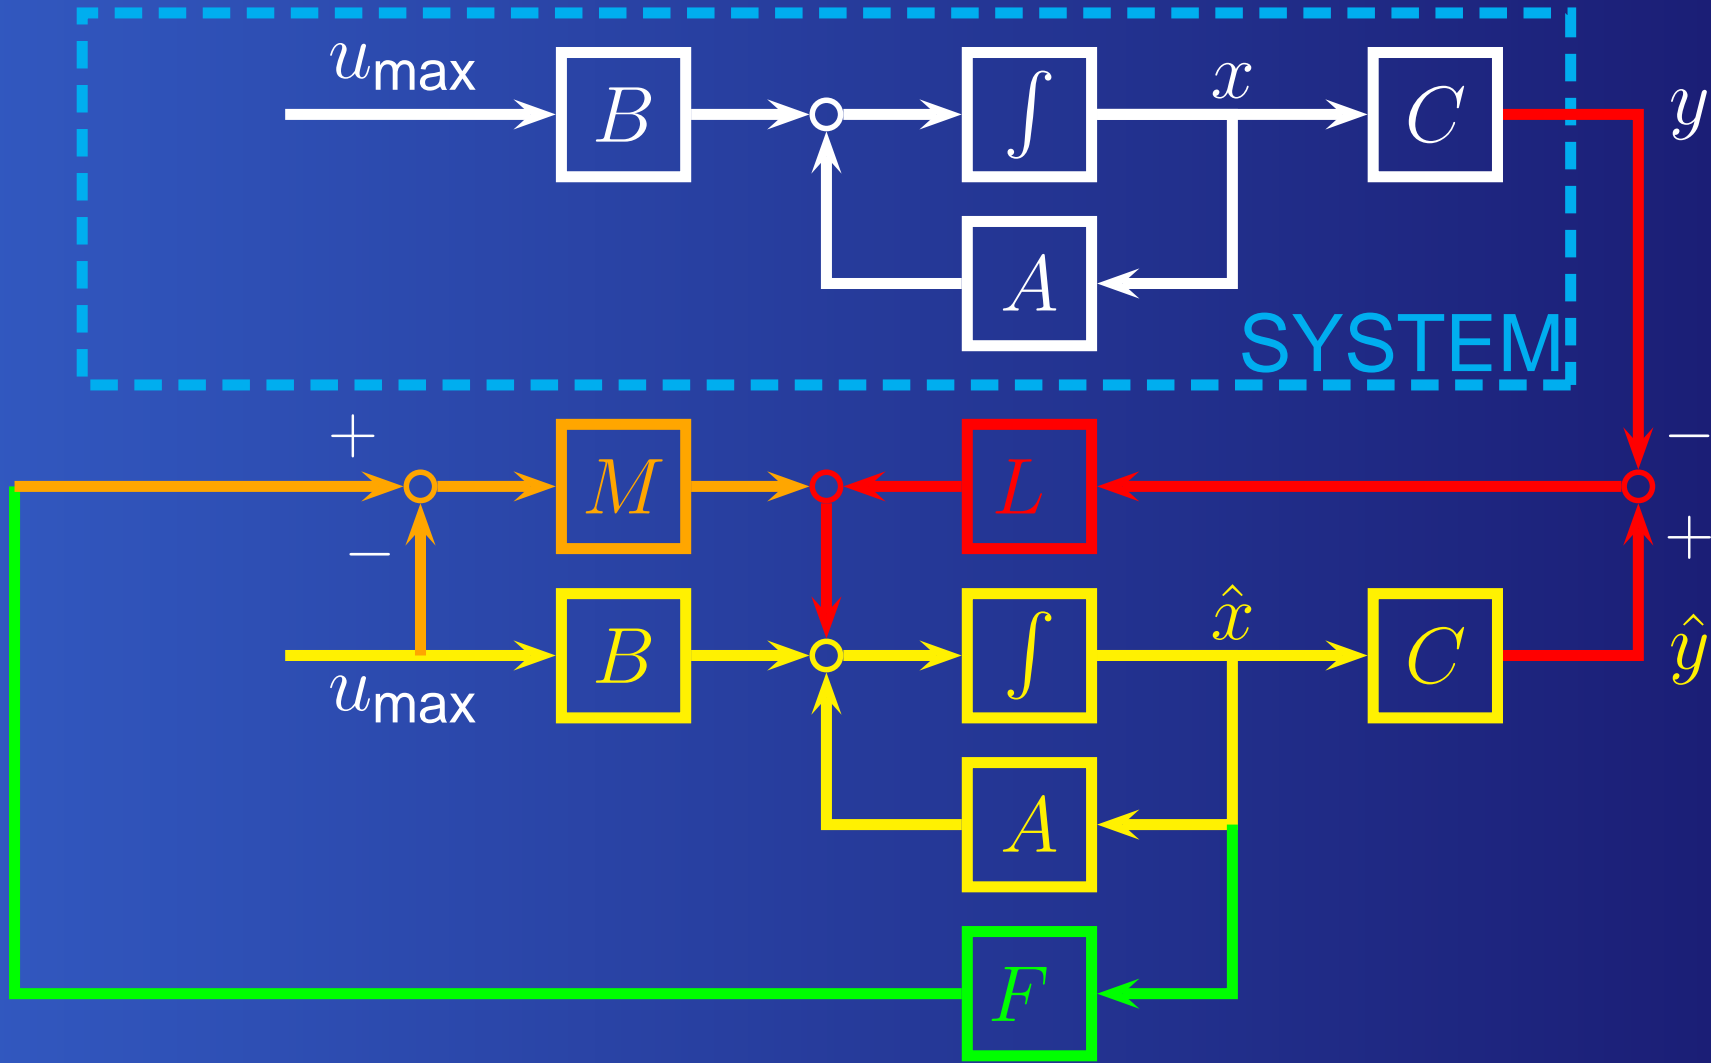



# Anti-windup architecture, saturated

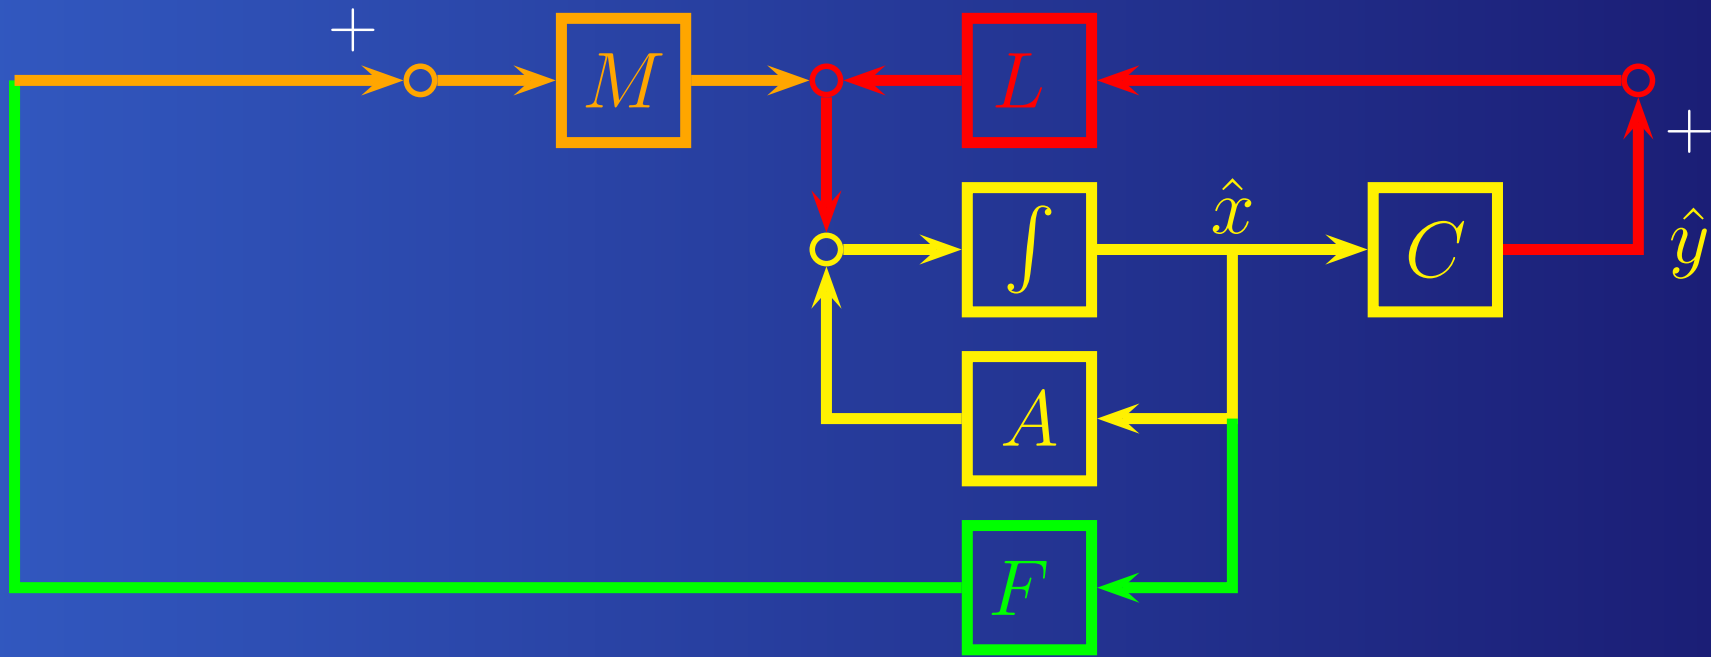



# Designing saturation gain

Dynamics of controller during saturation:

$$\dot{\hat{x}} = A\hat{x} + LC\hat{x} + MF\hat{x}$$

or

$$\dot{\hat{x}} = (A + LC + MF)\hat{x}$$



# Designing saturation gain

Dynamics of controller during saturation:

$$\dot{\hat{x}} = A\hat{x} + LC\hat{x} + MF\hat{x}$$

or

$$\dot{\hat{x}} = (A + LC + MF)\hat{x}$$

Determining  $M$  can be recognized as an observer gain design problem:

$$\dot{\hat{x}} = (\tilde{A} + \tilde{L}\tilde{C})\hat{x}$$

with  $\tilde{A} = A + LC$ ,  $\tilde{L} = M$ , and  $\tilde{C} = F$ , from which the unknown  $\tilde{L} = M$  can be chosen to assign any desired poles to the saturated controller.



# Contents

- Introducing the reference signal
- The zero assignment method
  - Example: zero assignment
- Anti-windup
- **Optimal control**
  - Example: optimal control
- One slide course summary



# Optimal control

We consider a linear control system of the form:

$$\begin{aligned}\dot{x} &= Ax + Bu, & x(0) &= x_0 \\ y &= Cx\end{aligned}$$

A control law for such a system is said to be *optimal*, if it minimizes the cost functional:

$$\mathcal{J} = \int_0^{\infty} x^T Q x + u^T R u \, dt$$

where  $Q = Q^T$  is a positive semi-definite matrix and  $R = R^T$  is a positive definite matrix.



# The algebraic Riccati equation

An *Algebraic Riccati Equation* is a second order matrix equation in an indeterminate

$P = P^T \in \mathbb{R}^{n \times n}$  of the form:

$$A^T P + P A - P B R^{-1} B^T P + Q = 0$$

where  $A \in \mathbb{R}^{n \times n}$ ,  $B \in \mathbb{R}^{n \times m}$  are matrices,  
 $R = R^T \in \mathbb{R}^{m \times m}$  is a positive definite matrix, and  
 $Q = Q^T \in \mathbb{R}^{n \times n}$  is a positive semidefinite matrix.



# The algebraic Riccati equation

An *Algebraic Riccati Equation* is a second order matrix equation in an indeterminate

$P = P^T \in \mathbb{R}^{n \times n}$  of the form:

$$A^T P + P A - P B R^{-1} B^T P + Q = 0$$

where  $A \in \mathbb{R}^{n \times n}$ ,  $B \in \mathbb{R}^{n \times m}$  are matrices,  $R = R^T \in \mathbb{R}^{m \times m}$  is a positive definite matrix, and  $Q = Q^T \in \mathbb{R}^{n \times n}$  is a positive semidefinite matrix.  $P$  is called a *stabilizing solution* to the ARE, if it satisfies the equation, and further satisfies that the eigenvalues of  $A - B R^{-1} B^T P$  are in the open left half plane.



# Optimal state feedback control

**THEOREM.** Consider a linear system of the form:

$$\begin{aligned}\dot{x} &= Ax + Bu, & x(0) &= x_0 \\ y &= Cx\end{aligned}$$

Let  $P$  be a stabilizing solution to the ARE:

$$A^T P + PA - PBR^{-1}B^T P + Q = 0$$

Then the optimal state feedback law is given by:

$$u = Fx \quad \text{where} \quad F = -R^{-1}B^T P$$



# Output variance minimization

Introducing  $y = Cx$  into a cost functional of the type

$$\mathcal{J} = \int_0^{\infty} \rho y^T y + u^T u dt, \quad \rho \in \mathbb{R}$$

this can be written as an optimal control problem

$$\begin{aligned} \mathcal{J} &= \int_0^{\infty} \rho y^T y + u^T u dt \\ &= \int_0^{\infty} \rho x^T C^T C x + u^T u dt \\ &= \int_0^{\infty} x^T Q x + u^T R u dt, \quad Q = \rho C^T C, R = I \end{aligned}$$



# Optimal state estimation

Given the system

$$\begin{aligned}\dot{x} &= Ax + Bu + Gw \\ y &= Cx + Du + v\end{aligned}$$

with unbiased process noise  $w$  and measurement noise  $v$  with covariances

$$\mathcal{E}\{ww^T\} = Q, \quad \mathcal{E}\{vv^T\} = R$$

Then an optimal state estimator is given by:

$$\dot{\hat{x}} = A\hat{x} + Bu + L(C\hat{x} - y)$$



# Optimal state estimation

with unbiased process noise  $w$  and measurement noise  $v$  with covariances

$$\mathcal{E}\{ww^T\} = Q, \quad \mathcal{E}\{vv^T\} = R$$

Then an optimal state estimator is given by:

$$\dot{\hat{x}} = A\hat{x} + Bu + L(C\hat{x} - y)$$

where

$$L = -PC^T R^{-1}$$

$P$  is a stabilizing solution to the ARE:

$$AP + PA^T - PC^T R^{-1} CP + Q = 0$$



# Contents

- Introducing the reference signal
- The zero assignment method
  - Example: zero assignment
- Anti-windup
- Optimal control
  - **Example: optimal control**
- One slide course summary



# Example: optimal control (1)

We consider once again the system

$$\dot{x} = \begin{pmatrix} 2 & -3 \\ 4 & -5 \end{pmatrix} x + \begin{pmatrix} 2 \\ 3 \end{pmatrix} u$$
$$y = \begin{pmatrix} -3 & 2 \end{pmatrix} x$$

Computing an optimal state feedback for the cost functional:

$$\mathcal{J} = \int_0^{\infty} 800 y^T y + u^T u dt$$

can be done with the MATLAB<sup>TM</sup> command

$$F_{opt} = -lqr(A, B, 800 * C' * C, 1)$$



## Example: optimal control (2)

This yields the result:

$$F_{\text{opt}} = \begin{pmatrix} 69.3536 & -47.8542 \end{pmatrix}$$


In comparison, a pole assignment with the poles  $\{-4, -8\}$  leads to the gain:

$$F = \begin{pmatrix} 72 & -51 \end{pmatrix}$$

A first glance would suggest that the pole assignment with its larger gains would have faster dynamics. However, the optimal feedback assigns complex poles, giving a better rise-time.



# Example: optimal control (3)

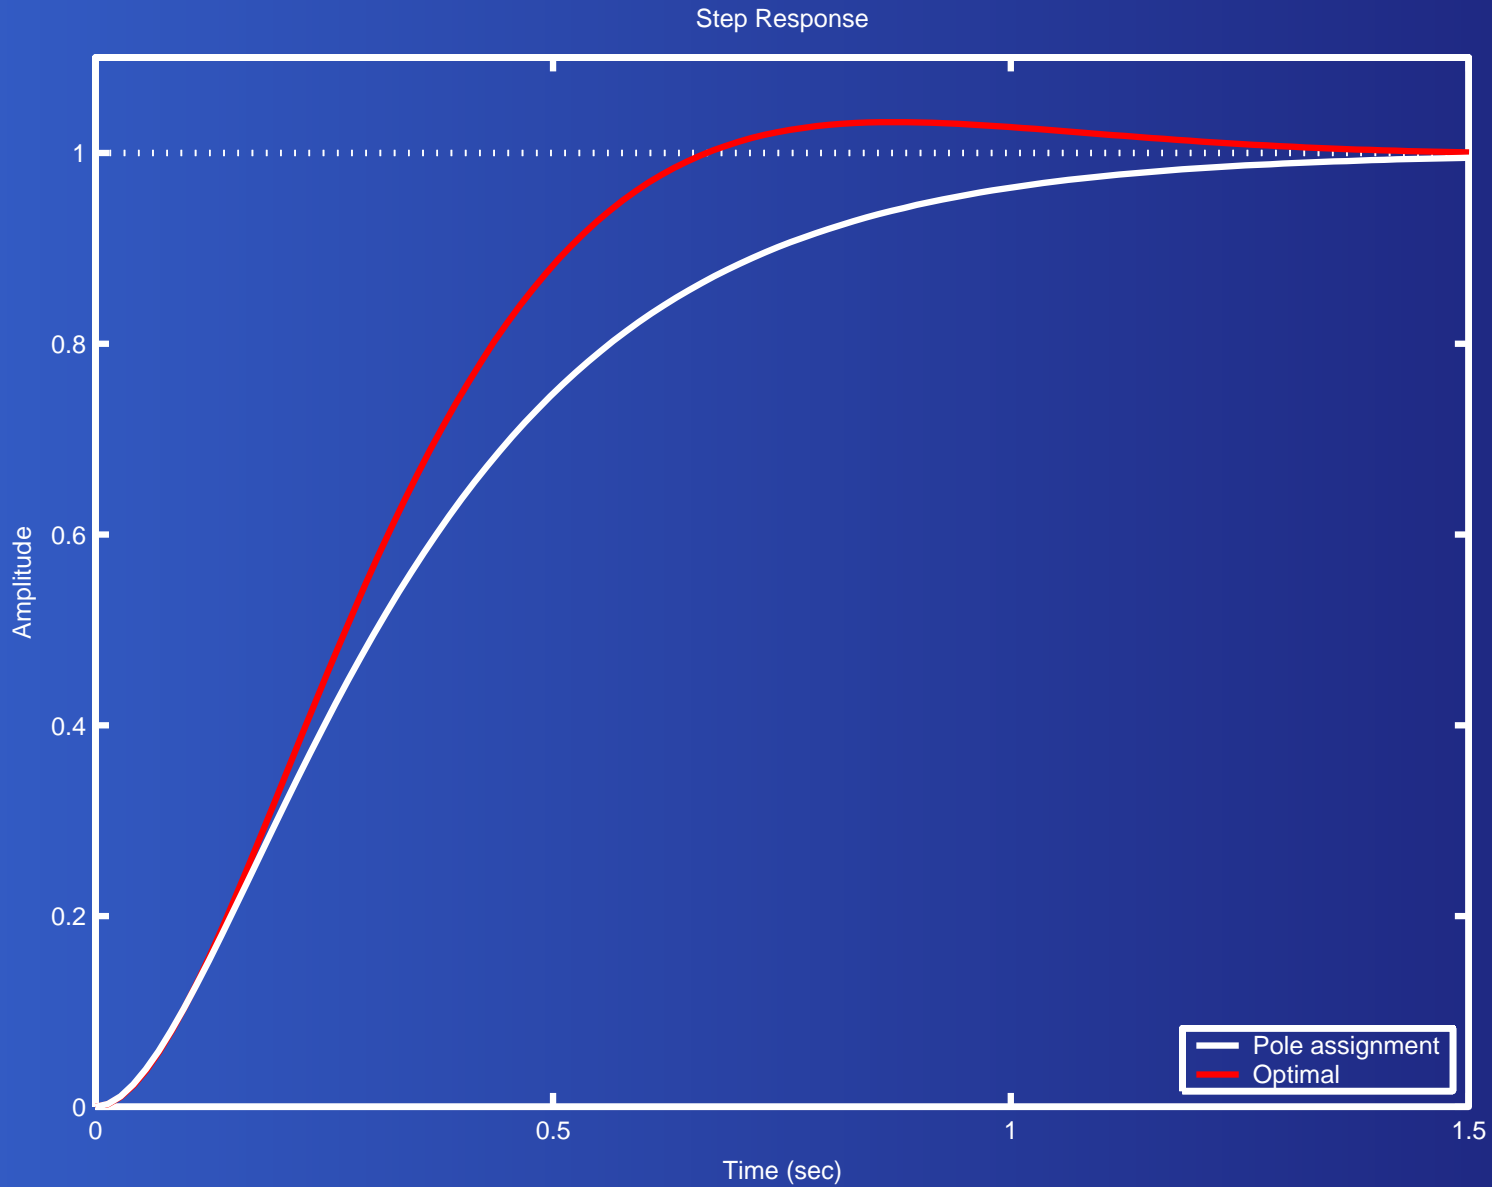



# Contents

- Introducing the reference signal
- The zero assignment method
  - Example: zero assignment
- Anti-windup
- Optimal control
  - Example: optimal control
- **One slide course summary**



# One slide course summary

- State space models



# One slide course summary

- State space models
- Controllability



# One slide course summary

- State space models
- Controllability
- State feedback design (pole assignment)



# One slide course summary

- State space models
- Controllability
- State feedback design (pole assignment)
- Observability



# One slide course summary

- State space models
- Controllability
- State feedback design (pole assignment)
- Observability
- Observer gain design (pole assignment)



# One slide course summary

- State space models
- Controllability
- State feedback design (pole assignment)
- Observability
- Observer gain design (pole assignment)
- Observer based control (separation theorem)



# One slide course summary

- State space models
- Controllability
- State feedback design (pole assignment)
- Observability
- Observer gain design (pole assignment)
- Observer based control (separation theorem)
- Reduced order observers



# One slide course summary

- State space models
- Controllability
- State feedback design (pole assignment)
- Observability
- Observer gain design (pole assignment)
- Observer based control (separation theorem)
- Reduced order observers
- Integral state space control



# One slide course summary

- State space models
- Controllability
- State feedback design (pole assignment)
- Observability
- Observer gain design (pole assignment)
- Observer based control (separation theorem)
- Reduced order observers
- Integral state space control
- Zero assignment



# One slide course summary

- State space models
- Controllability
- State feedback design (pole assignment)
- Observability
- Observer gain design (pole assignment)
- Observer based control (separation theorem)
- Reduced order observers
- Integral state space control
- Zero assignment
- Anti-windup



# One slide course summary

- State space models
- Controllability
- State feedback design (pole assignment)
- Observability
- Observer gain design (pole assignment)
- Observer based control (separation theorem)
- Reduced order observers
- Integral state space control
- Zero assignment
- Anti-windup
- Optimal control